






Project Name:

Note:

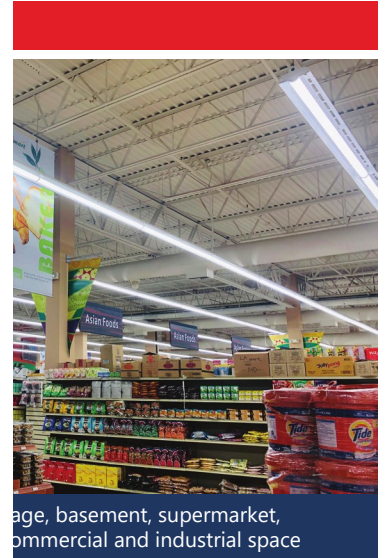


age, basement, supermarket,
commercial and industrial space

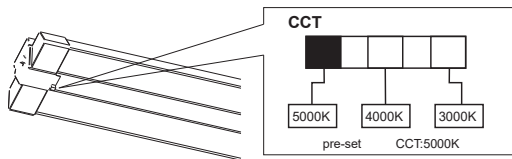

SPECIFICATIONS

Model No	HY-4FT-LSP-30W-30K/40K/50K
Power	30W
Input Voltage	AC 110-277V
Luminous Flux	4156.93 LM
Efficiency	130 LM/W
Power Factor	>0.9
CCT	CCT Selectable: 3000K/4000K/5000K
CRI	>80
Working Life	>50,000 hours
Working Temperature	-10°F to 105°F
Protection Level	Dry/Damp Location
DLC Family Code	P50DDZJQ
Qty/Pack	10
Master Package Size	47.83"8.66"x7.87"
Master Package Weight	24.91 LB


ACCESSORIES

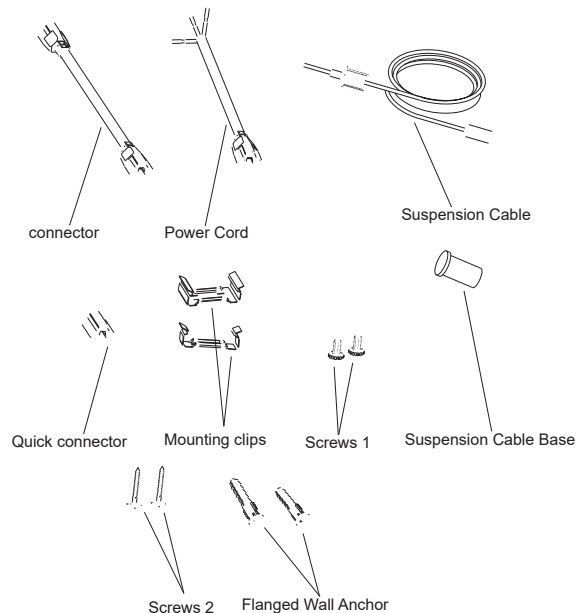

ORDERING CODE DEFINITION





EXAMPLE: HY-4FT-LSP-30W-30K/40K/50K

Company Code	Length	Product	Wattage	CCT
HY	4FT	LSP: Linear Shop Light	30W	CCT Tunable 3000K 4000K 5000K








INSTALLATION INSTRUCTION

SURFACE MOUNT INSTALLATION

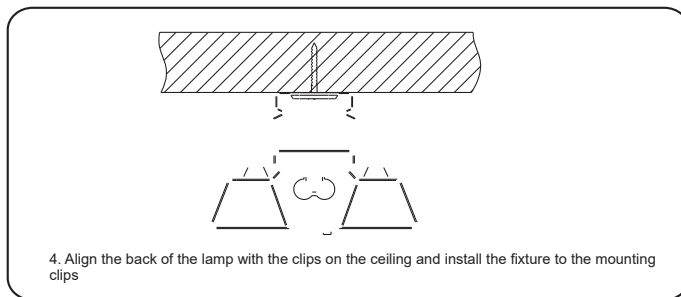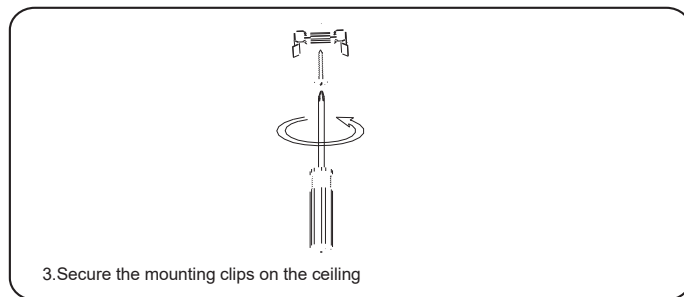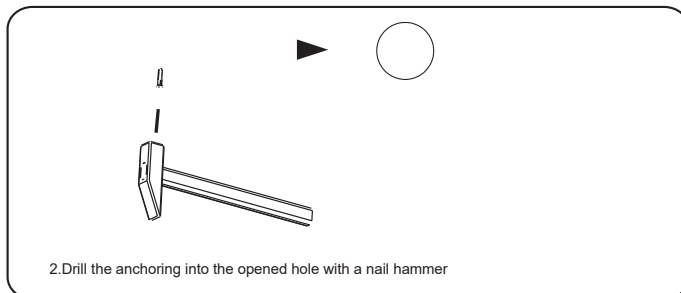
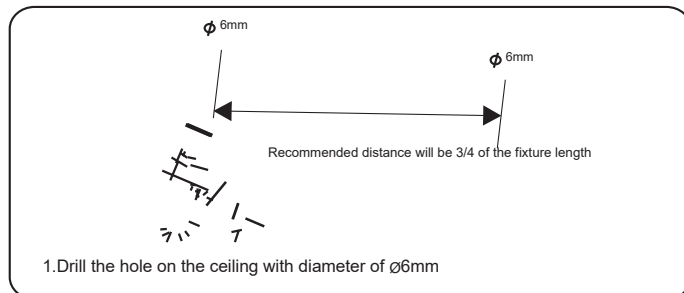


SUSPENDED MOUNT INSTALLATION

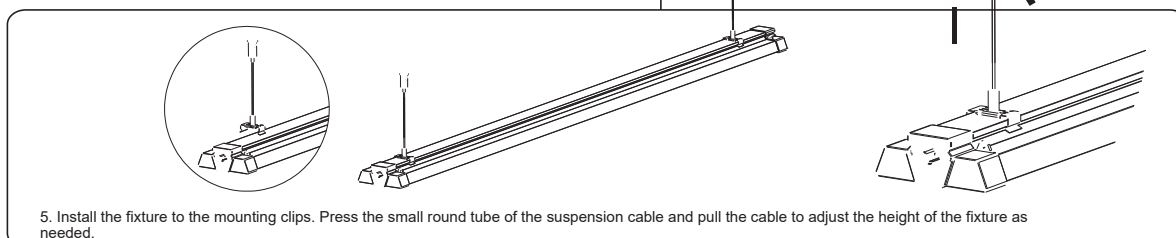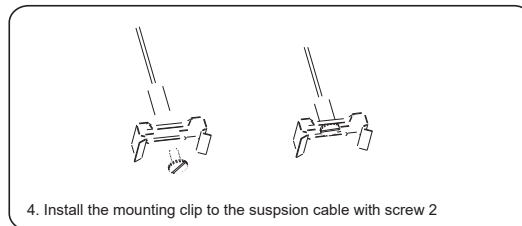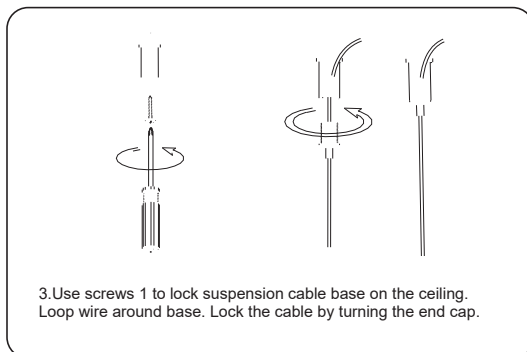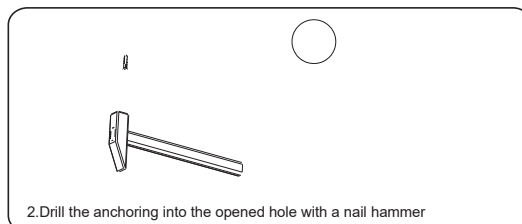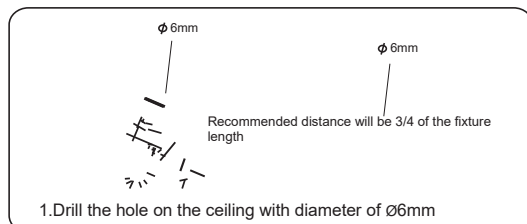

1. Please find the connector in the accessories bag.
2. Plug the connector into the tube.

Note:
For safety standard,
please do not connect more than 4pcs 4ft LED lamp in a row; do not
connect more than 3 pcs 8ft LED lamp in a row.

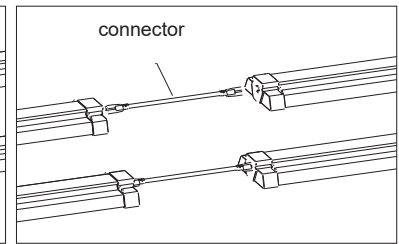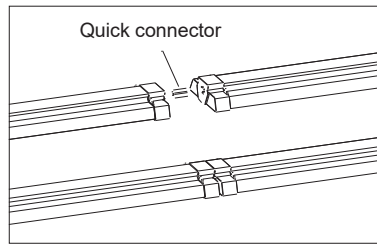


WIRING


Black/Live

White/Neutral

Green/Ground




CCT ADJUSTABLE GUIDE

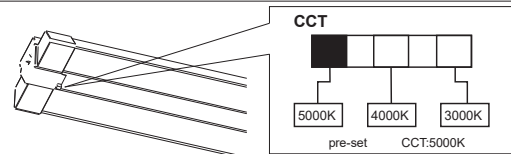

This Fixture has three color temperature of (3000K, 4000K, 5000K) and CCT can be adjusted by the switch on the front of the fixture.

PHOTOMETRIC REPORT


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

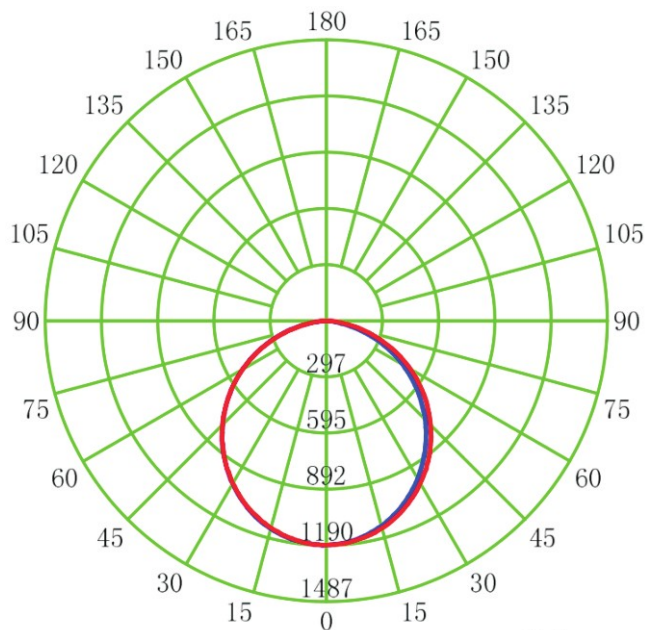

— C0-C180

— C90-C270

VERTICAL EQUILUMINOUS CURVE

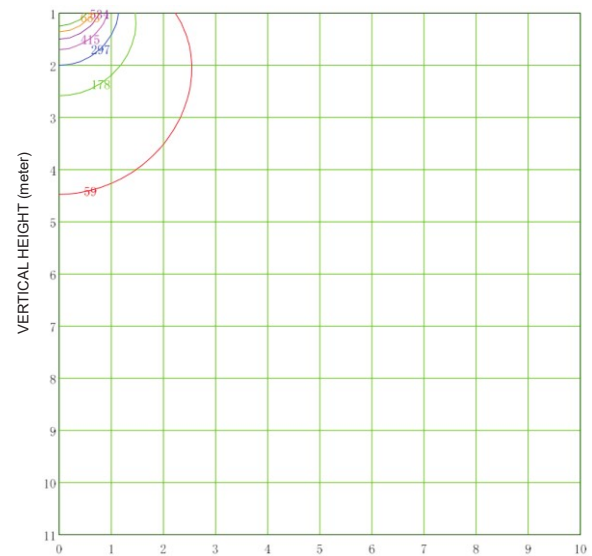

HORIZONTAL DISTANCE (meter)

MINIMUM ALTITUDE 1.0 M
MAXIMUM ALTITUDE 11.0 M
MAXIMUM ILLUMINATION 1186.8 lx

(5%) : 59.3 lx	(15%) : 178.0 lx
(25%) : 296.7 lx	(35%) : 415.4 lx
(45%) : 534.1 lx	(55%) : 652.7 lx
(65%) : 771.4 lx	