




LED Waterproof Integrated Linear Light

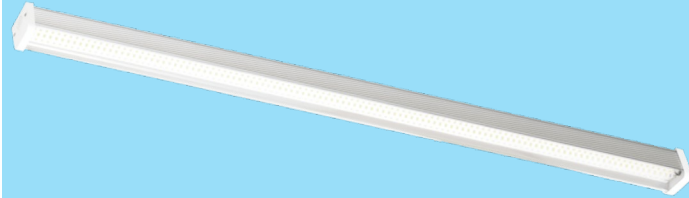

Application: Awning, Parking garages; docks; subway station; canopy; walk-in refrigerators and etc.

Certifications



SPECIFICATIONS

Model No.	HY-WPINT-4FT-36W-XXK	HY-WPINT-8FT-72W-XXK
Wattage	36W	72W
Size	4FT	8FT
Lumens	4680 LM	9360 LM
Rated Input Voltage(V)	120-277V	
Cover	Clear/Frosted	
CCT	6500K	
Body	Aluminum	
Beam Angle (°)	110°	
Dimming	Non Dimmable	
Lumen Efficiency	130 Lm/W	
Color Rendering Index	Ra>80	
Power Factor	0.95	
Working Temperature	-4 ° F ~ +105 ° F / -15 ° C ~ +40 ° C	
Storage Temperature	-4 ° F ~ +105 ° F / -15 ° C ~ +40 ° C	
Environment Location	IP 65	
Lifespan	Lumen Maintenance over 70% @ 50,000+ Hours	
Warranty	5 Years Limited	
Certificate	ETL	
Package Info	51.2"X9.4"X9.3"	96.9"X9.4"X9.3"
PC/ Master Pack	20	20
Weight	29 lbs	53 lbs


FEATURE

- Waterproof IP65: ideal economical choice for wet and damp location (indoors or outdoors)
- Body: Durable 6063 extruded aluminum for efficient heat dissipation
- Easy Installation: back mounting clip for easy and quick installation

ACCESSORIES



Mounting clips



Screws 2



Flanged Wall Anchor


Optional Hanging Kit (Not Come with Light/Purchase Separately)



Screws 1



Suspension Cable Base



Suspension Cable


ORDERING CODE DEFINITION

EXAMPLE: HY-WPINT-4FT-36W-XXK


Company Code	Product	Size	Power:	CCT
HY	WPINT : LED Waterproof Integrated Light	4FT	36W	6500K
		8FT	72W	




Front View




Side View




4ft Front View



Side View




FEATURE

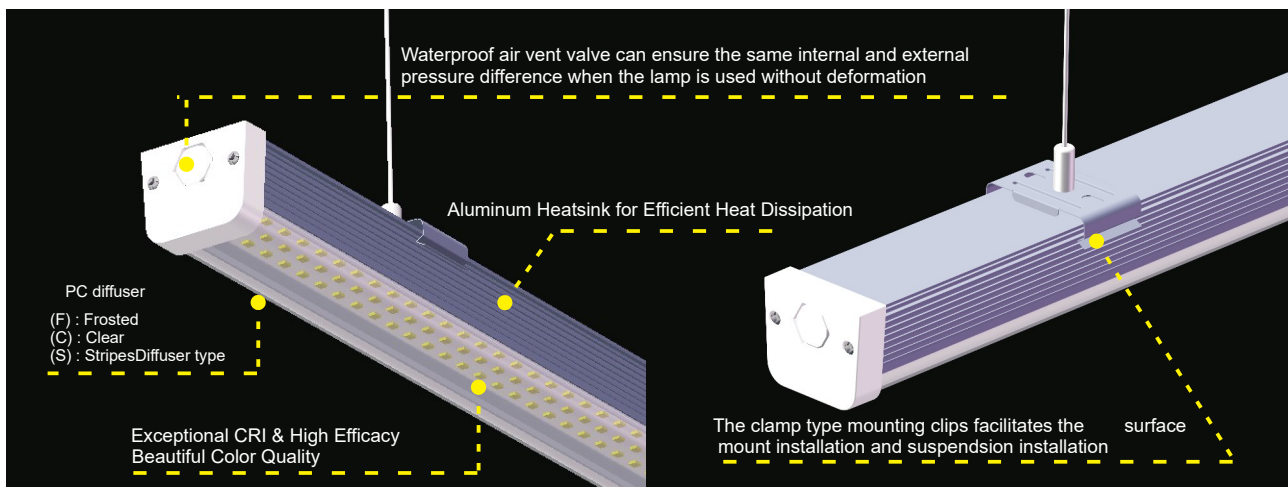


PHOTOMETRICS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

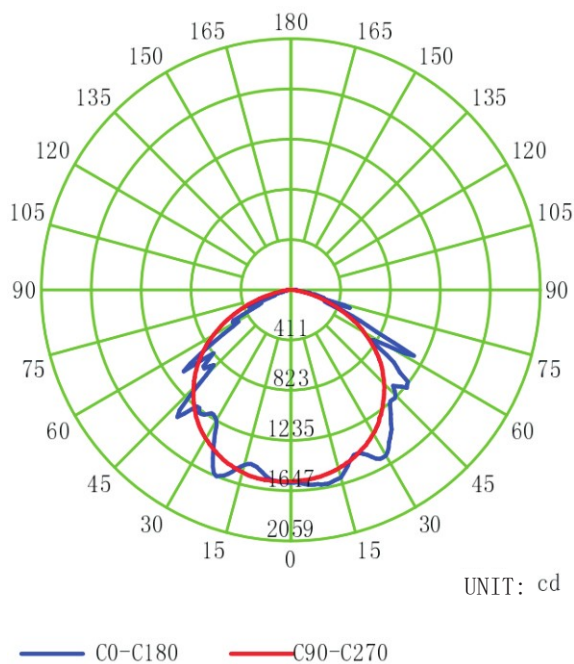

VERTICAL EQUILUMINOUS CURVE




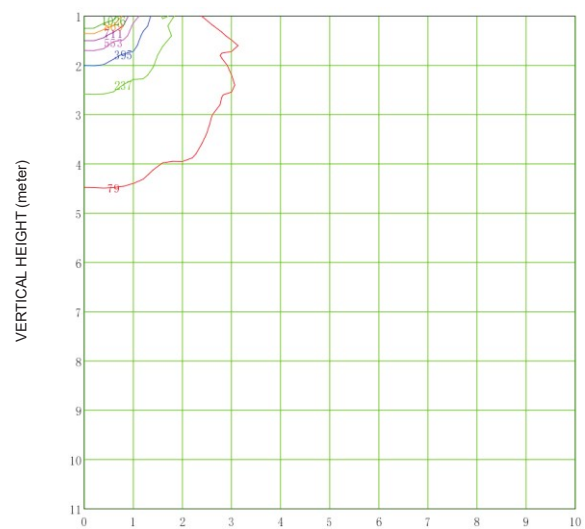


HORIZONTAL DISTANCE (meter)






MINIMUM ALTITUDE 1.0 M
MAXIMUM ALTITUDE 11.0 M
MAXIMUM ILLUMINATION 1579.2 lx

(5%) : 79.0 lx	(15%) : 236.9 lx
(25%) : 394.8 lx	(35%) : 552.7 lx
(45%) : 710.6 lx	(55%) : 868.6 lx
(65%) : 1026.5 lx	

Surface mount installation

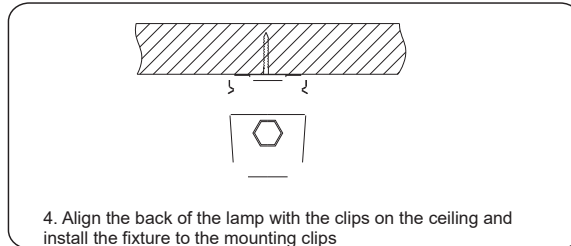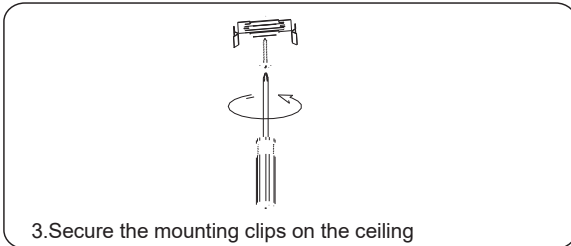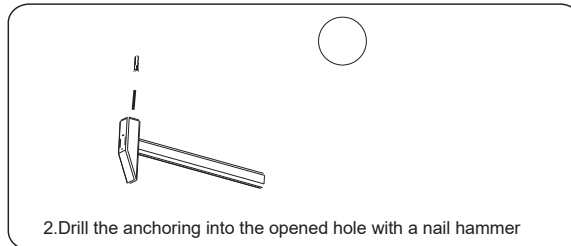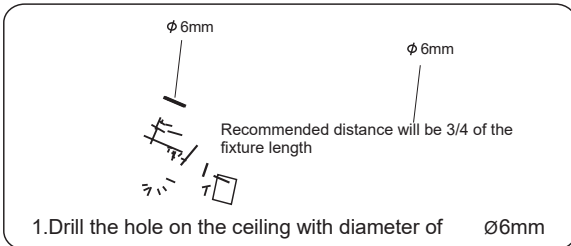

B Suspension installation

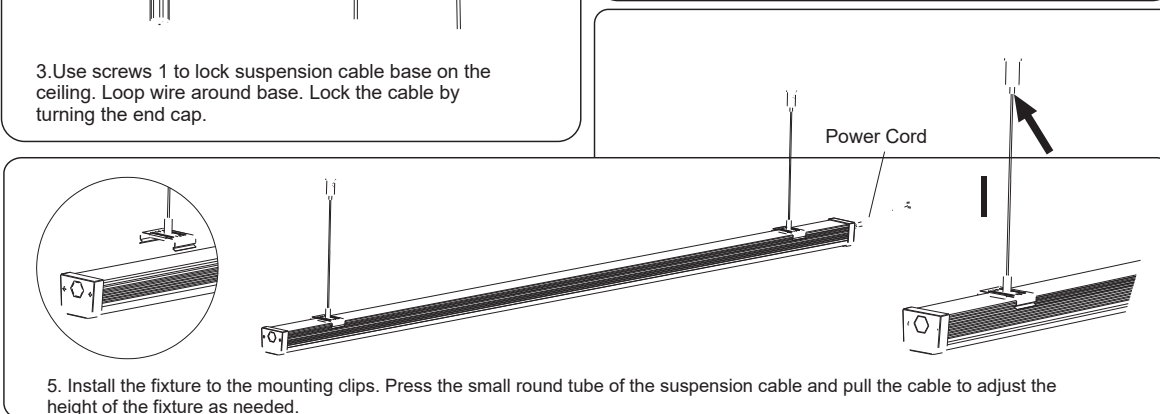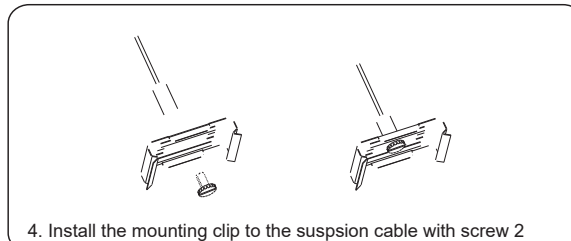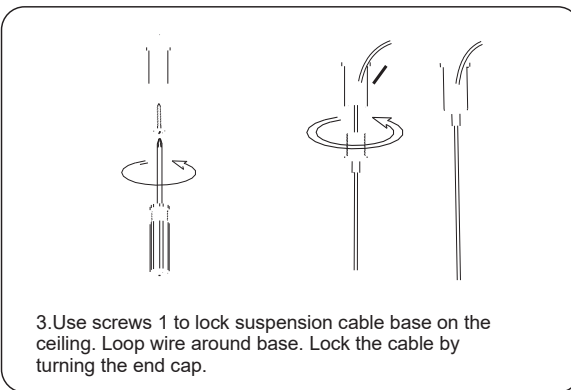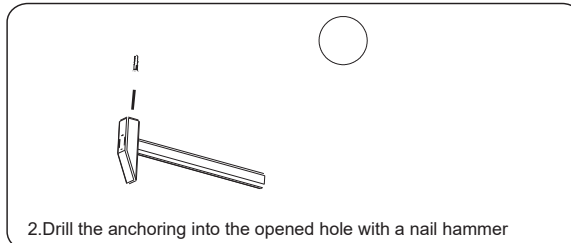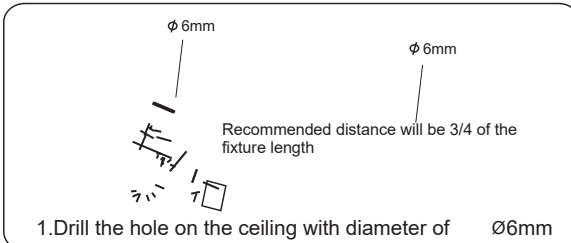

C Wiring Guide

