



Eco Bright Beam

Product Name: _____

Note: _____



installation. These sleek lights require no recessed housing and can be directly wired to a 4"/6" junction box. Enjoy instant, bright illumination in your kitchen, bedroom, bathroom, and more. Upgrade your space with effortless style and functionality.

Certifications



PF 0.9


CRI ≥80



SPECIFICATIONS

Model No.	HY -DSL-R4-10W-3CCT	HY -DSL-R6-15W-3CCT
Wattage	10W	15W
Size	4"	6"
Lumens	650 LM	1000 LM
Rated Input Voltage(V)	AC120V 60Hz	
CCT	CCT Selectable: 3000K/4000K/5000K	
Beam Angle (°)	120°	
Dimming	Triac dimming	
Color Rendering Index	Ra>80	
Power Factor	0.95	
Working Temperature	-4 ° F ~ +105 ° F / -15°C ~40°C	
Environment Location	IP 20 – Suitable for Damp Location	
Lifespan	Lumen Maintenance over 70% @ 50,000+ Hours	
Body Finish	White	
Certificate	ETL/Energy Star	
Package Info	19.3"x7.5"x13.2"	23.4"x7.5"x15.9"
PC/ Master Pack	30	30
Weight	13.9 LB	19.2LB

STRUCTURE

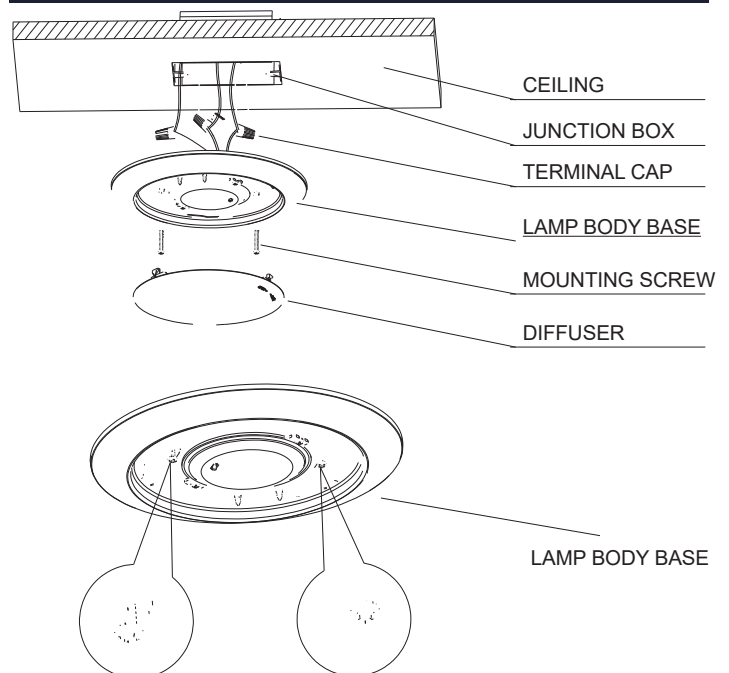

ORDERING CODE DEFINITION



EXAMPLE: HY -DSL-R4-10W-3CCT

Company Code	Product	Size	Watt	CCT
HY	DSL: Disk Light	R4: Round 4 inch	10W	3 CCT Selectable: 3000K/4000K/5000K
		R6: Round 6 inch	15W	



Front View


Side view

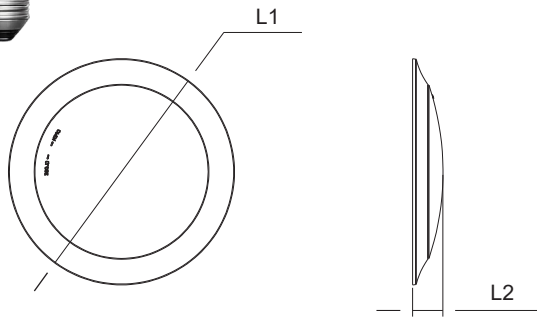


Model No.	HY -DSL-R4-10W-3CCT	HY -DSL-R6-15W-3CCT
Size		
L1	φ 150mm/ φ 5.9"	φ 185mm/ φ 7.28"
L2	25mm/0.98"	25mm/0.98"

INSTALLATION GUIDE

1 CCT Adjustable

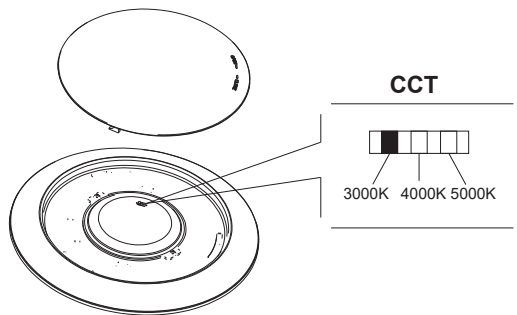


2 Wiring Guide

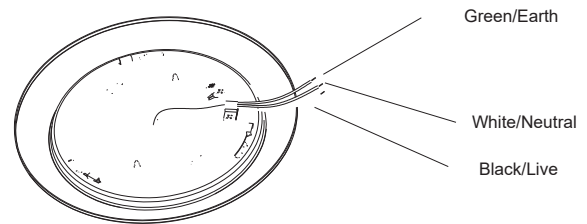


PHOTOMETRIC REPORT

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

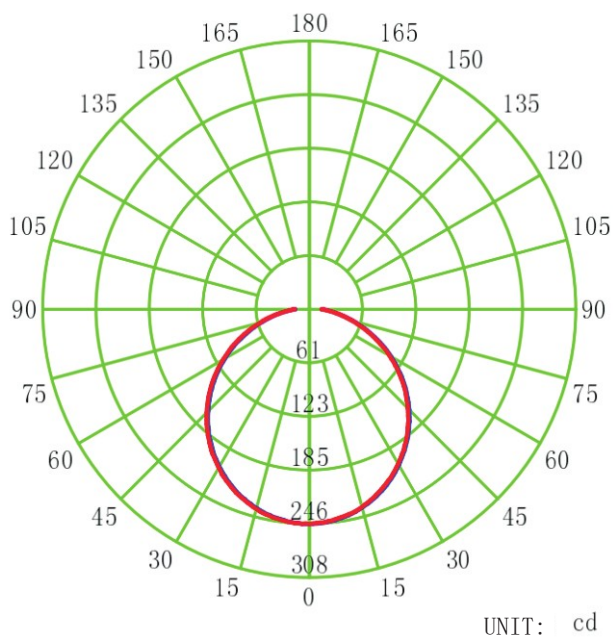

VERTICAL EQUILUMINOUS CURVE

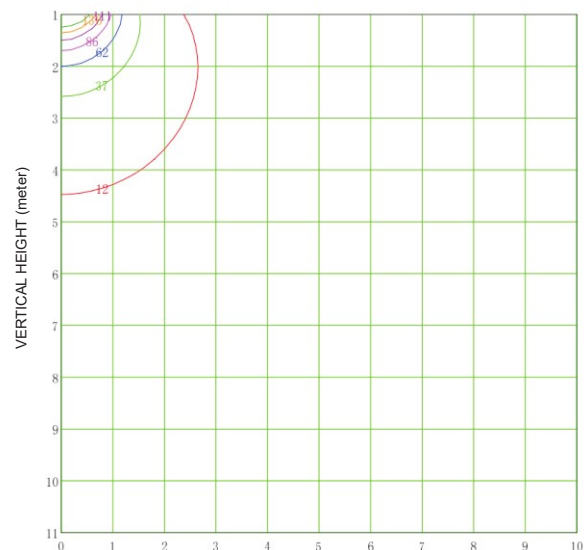

HORIZONTAL DISTANCE (meter)

MINIMUM ALTITUDE 1.0 M
MAXIMUM ALTITUDE 11.0 M
MAXIMUM ILLUMINATION 246.7 lx

(5%) : 12.3 lx	(15%) : 37.0 lx
(25%) : 61.7 lx	(35%) : 86.3 lx
(45%) : 111.0 lx	(55%) : 135.7 lx
(65%) : 160.3 lx	